









DH57JG

CAUTION



Risk of explosion if the battery is replaced with an incorrect type. Batteries should be recycled where possible. Disposal of used batteries must be in accordance with local environmental regulations.

Audio (Intel® HD Audio)				AC '97 Audio			
Sense2_Ret	10	9	Port2L	AUD_GND	10	9	FP_OUT_L
Key (no pin)	7		Sense_Send	Key (no pin)	7		NC
Sense1_Ret	6	5	Port2R	AUD_GND	6	5	FP_OUT_R
Presence#	4	3	Port1R	PRESENCE#	4	3	MIC_BIAS
Ground	2	1	Port1L	AUD_GND	2	1	MIC

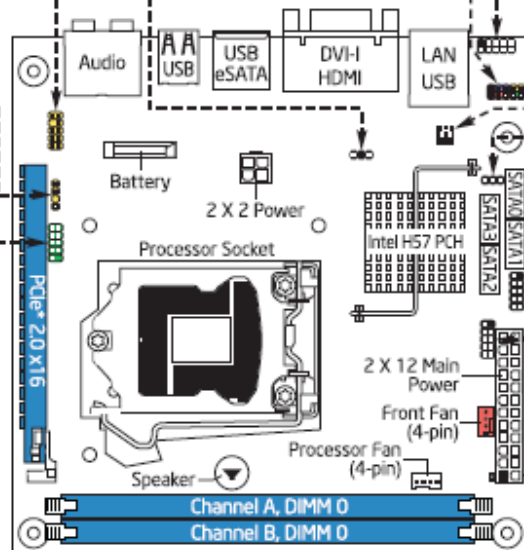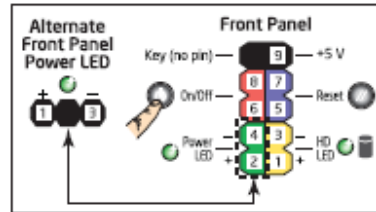

BIOS Configuration Jumper Block

1-2	Normal
2-3	Configuration
No Jumper	Recovery

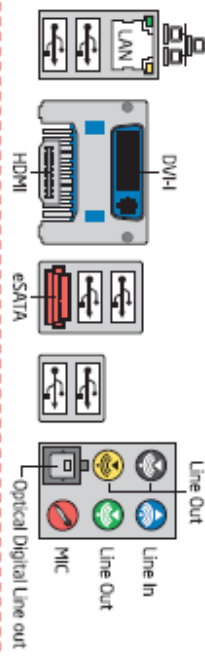

Attach this label near the back panel connectors.

Attach this label to the inside surface of the chassis.